





| REF | PICTURE | QTY | REF | PICTURE | QTY |
|-----|---------|------|-----|---------|-------|
| A | | 1pc | K | | 2pcs |
| B | | 4pcs | L | | 2pcs |
| C | | 4pcs | M | M8x50mm | 2pcs |
| D | | 2pcs | N | M8x90mm | 4pcs |
| E | | 1pc | O | M6x47mm | 2pcs |
| F | | 2pcs | P | M6x75mm | 4pcs |
| G | | 1pc | Q | | 8pcs |
| H | | 1pc | R | | 14pcs |
| I | | 1pc | S | | 6pcs |
| J | | 1pc | T | | 4pcs |
| | | | U | | 1pc |
| | | | V | | 1pc |

1

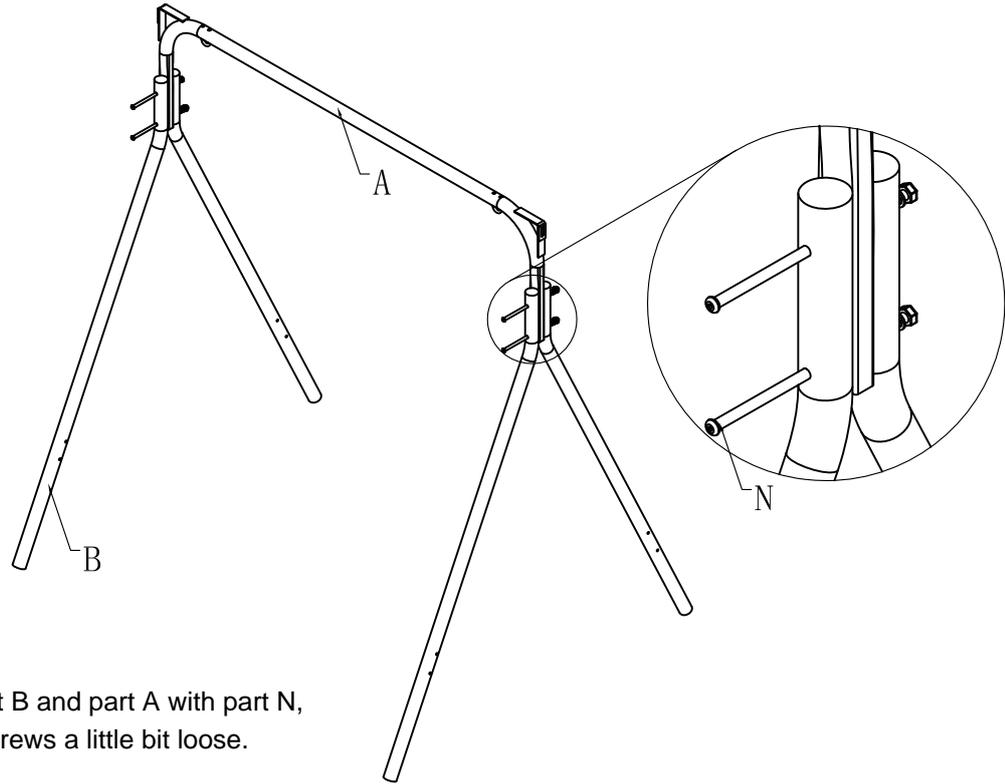


1. Assemble part B and part A with part N, and make the screws a little bit loose.

2

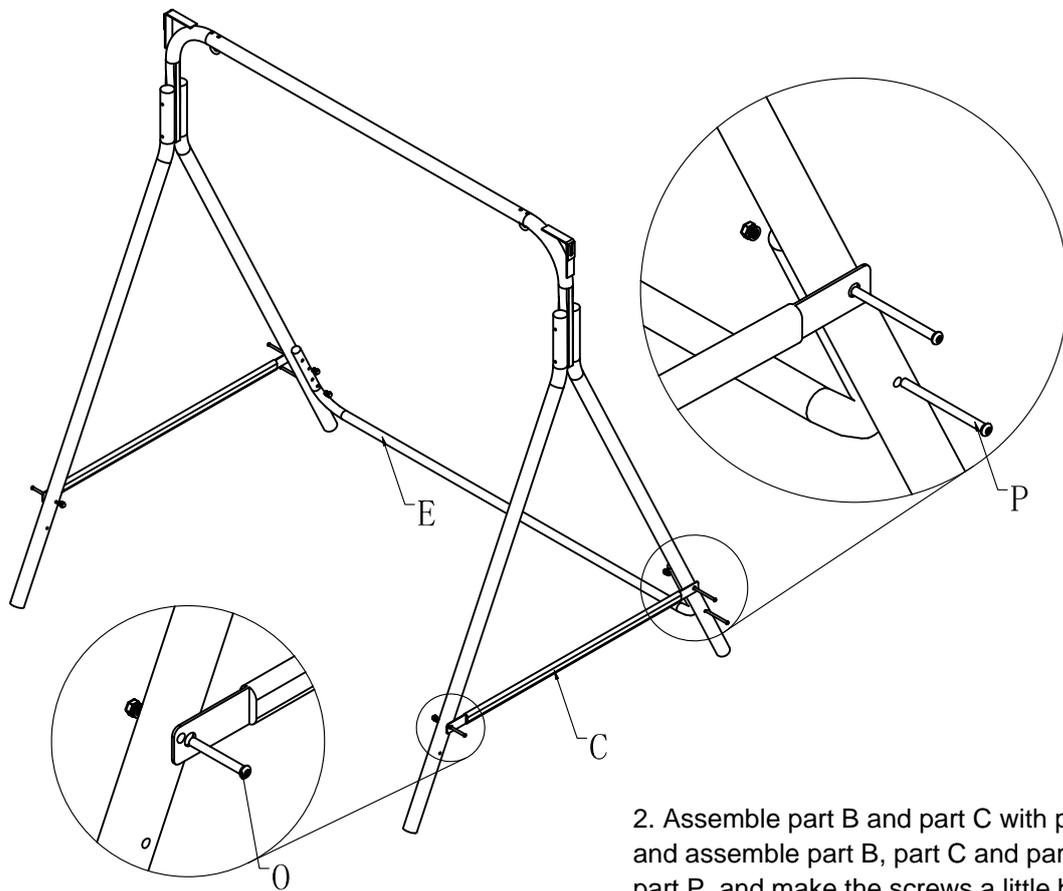


2. Assemble part B and part C with part O, and assemble part B, part C and part E with part P, and make the screws a little bit loose.

3

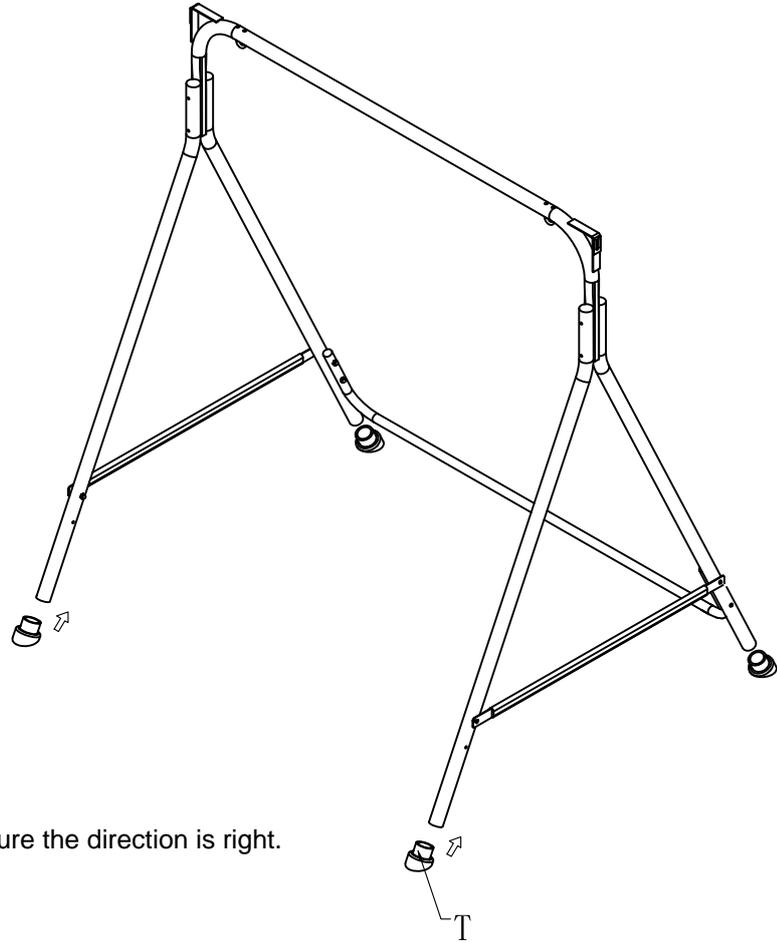


3. Assemble part T and make sure the direction is right.

4

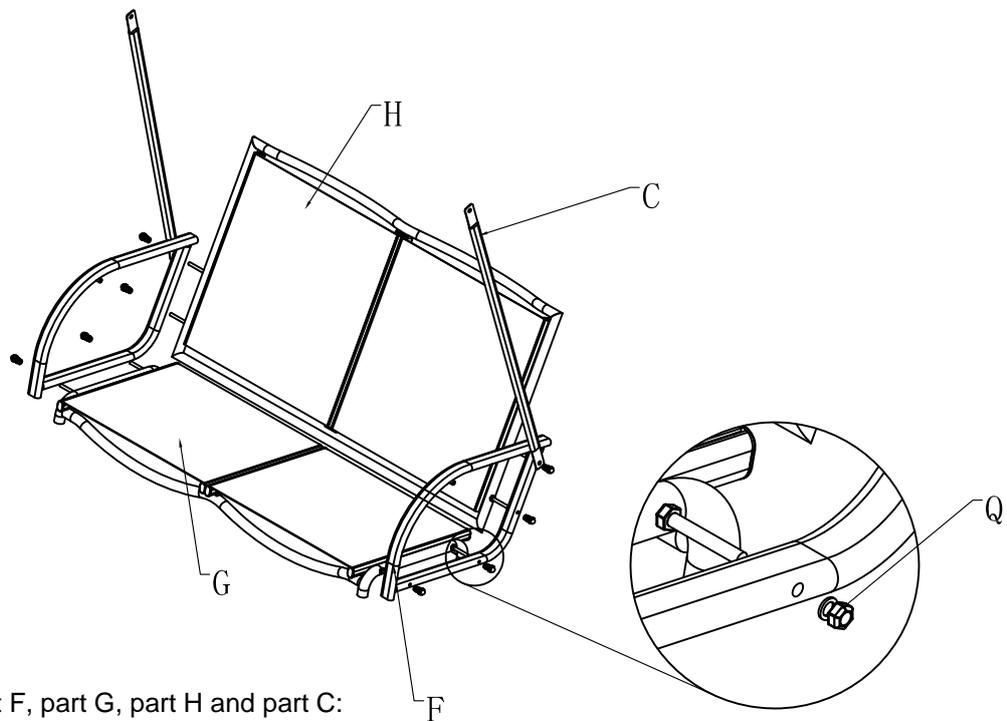


4. Assemble part F, part G, part H and part C:
Connect part F to the screws of part G and
part H. Recommend 2 persons for this step.
One person holds the part H, and the other
one assembles the part F. Then twist part Q,
and make the screws a little bit loose.

5

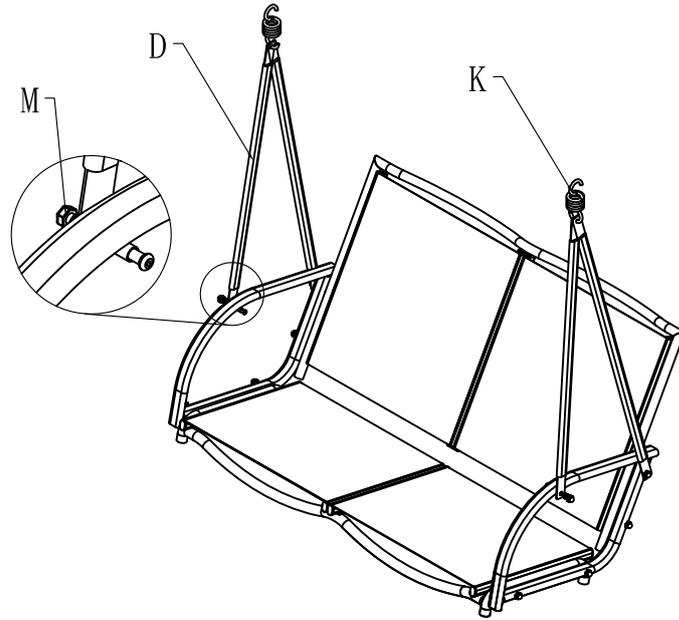


5. Assemble part D and part F with part M, and make the screws a little bit loose. Hang up part K.

6

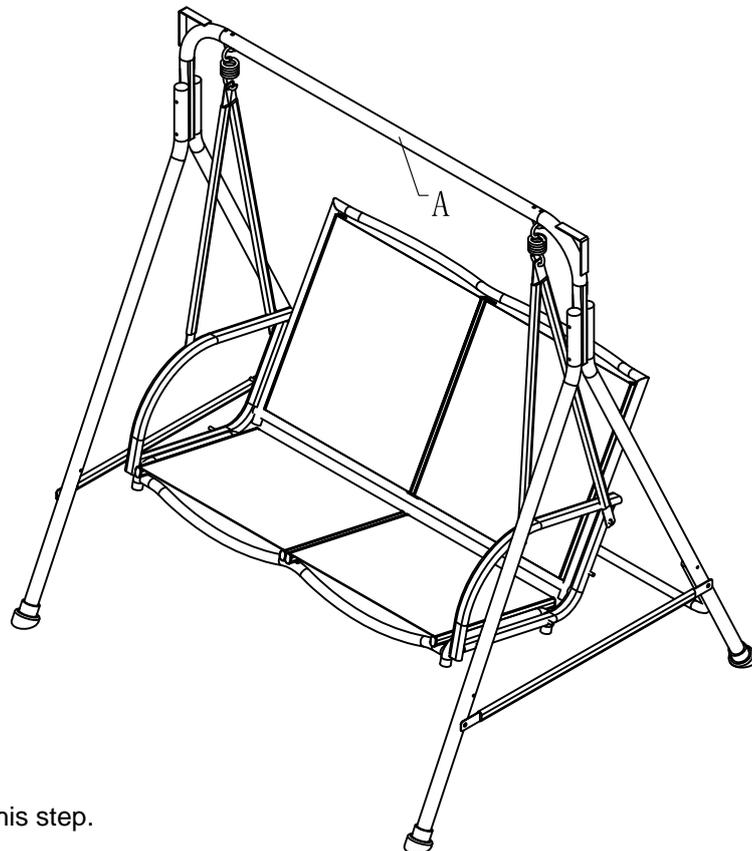


6. Hang the seat to part A. Recommend 2 persons for this step.

7

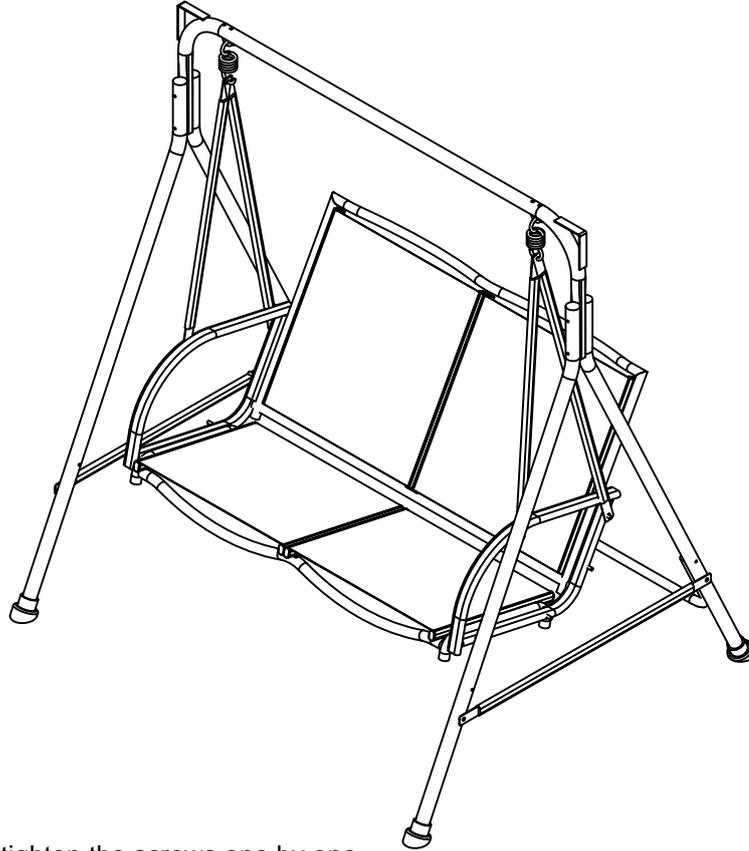


7. Swing the seat gently, tighten the screws one by one.
Put caps R or S onto the nuts.

8

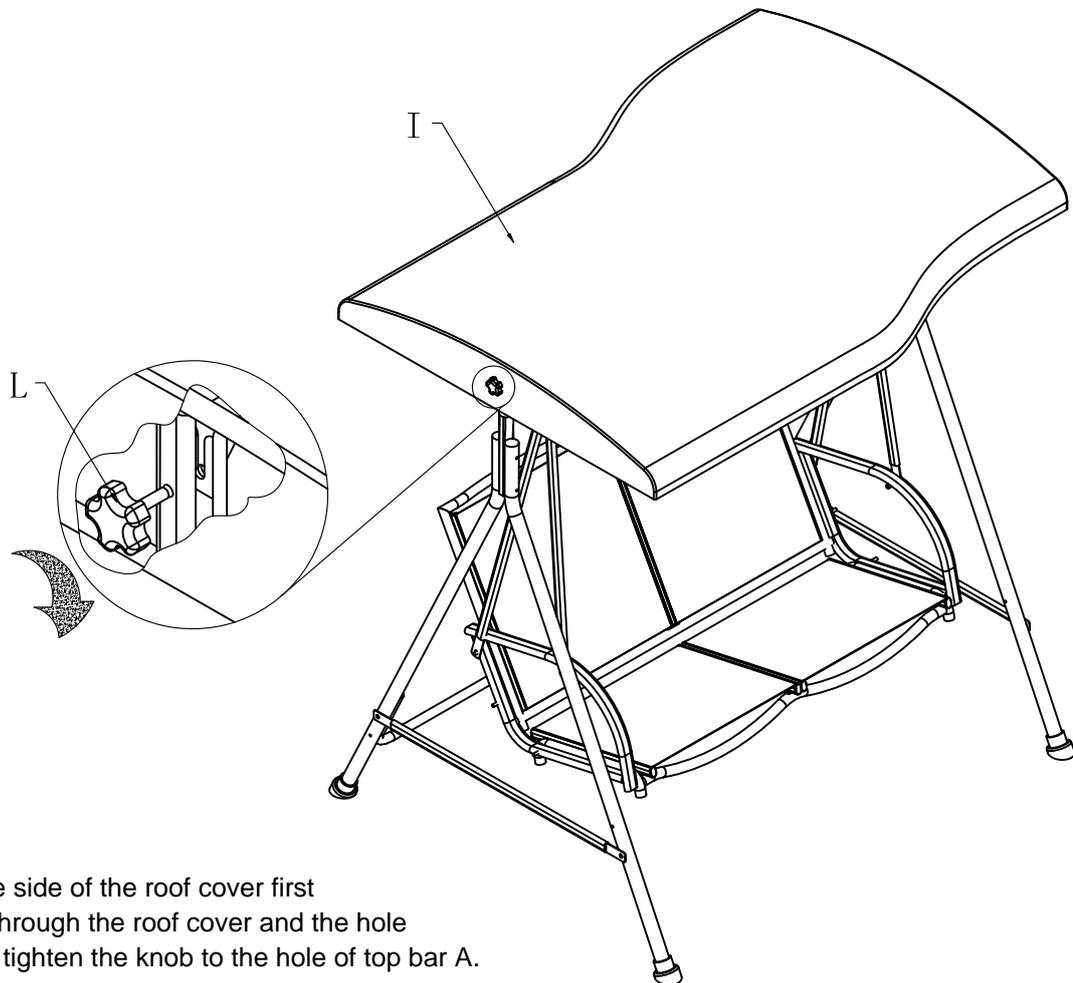

8. Install one side of the roof cover first
Put knob L through the roof cover and the hole
on the tube, tighten the knob to the hole of top bar A.

9

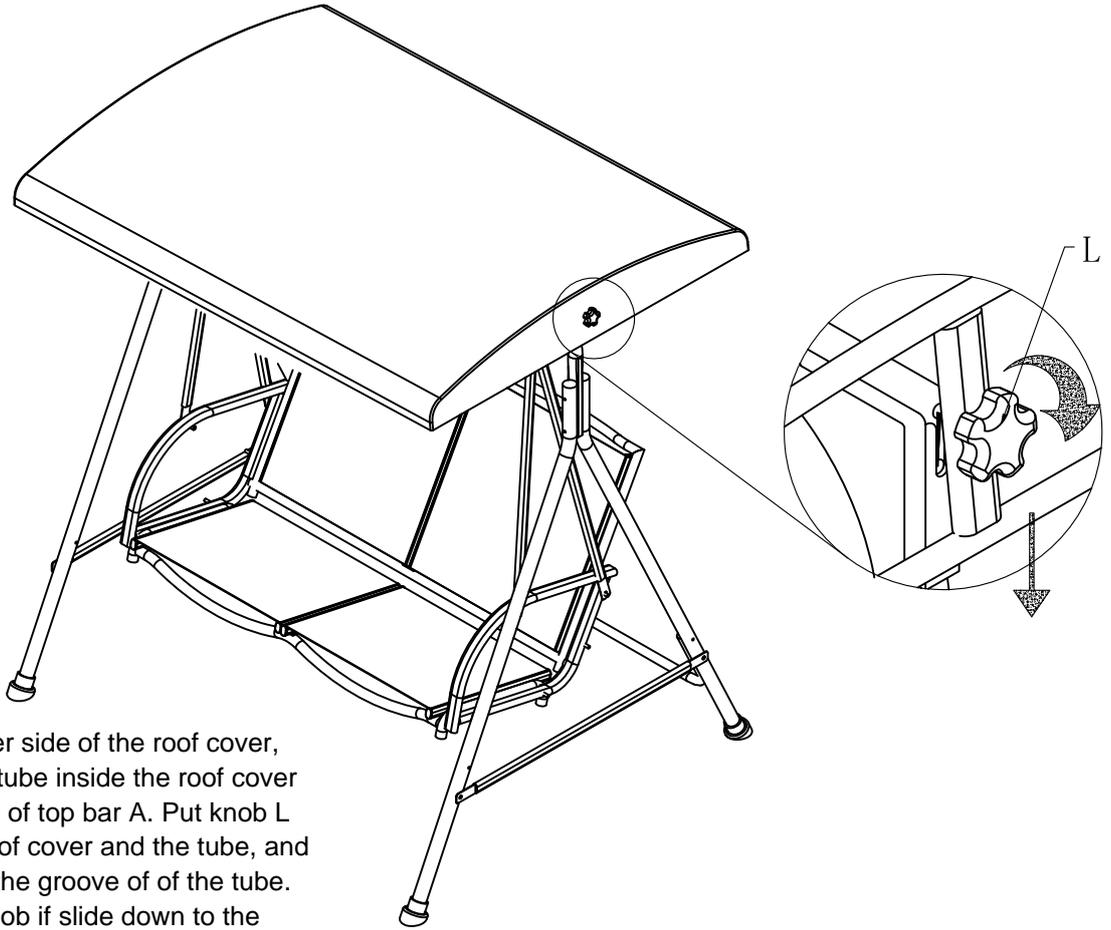

9. For the other side of the roof cover, pull down the tube inside the roof cover along the tube of top bar A. Put knob L through the roof cover and the tube, and slide down in the groove of the tube. Tighten the knob if slide down to the hole on the tube.

10



10. There are velcros on the magazine bag. Pull out the velcros, and stick to the armrest.